


## Visiera AFP-25 Per Arco Elettrico Classe 2

Visiera AFP-25 Per Arco Elettrico Classe 2 / AFF122-440-408

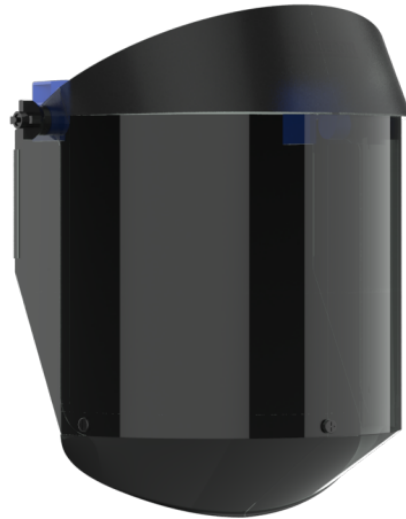

### DESCRIZIONE

L'AFP-25 è stato progettato per fornire la massima protezione degli occhi e del viso in caso di arco elettrico. In collaborazione con i produttori specializzati per rischi d'arco elettrico Oberon, la visiera è stata testata e valutata sulla gamma di caschi JSP EVO® (escluso Evo 6100 Full Brim), ottenendo la protezione di classe 2 GS-ET-29 e il massimo ATPV ammissibile di 25cal/cm<sup>2</sup> secondo ASTM F2178. Semplice da montare su caschi nuovi o esistenti della gamma EVO®, con un sistema di bilanciamento del peso opzionale (questo compatibile con casco EVO®5) che facilita il posizionamento con una sola mano per una maggiore libertà di lavoro.

### OPZIONI

#### Visiera AFP-25 Per Arco Elettrico Classe 2 (AFF122-440-408)

Visiera AFP-25 Per Arco Elettrico Classe 2 da Elmetto con Sistema di Bilanciamento del Peso (AFF132-440-408)

### STANDARD DI SICUREZZA

EN 166 • EN 170 • ANSI Z87. 1 • GS-ET-29 • ASTM F2178-12



## SPECIFICHE



RADIATION PROTECTION BREAKDOWN filtering effect  
Scale Number  
2C



LIGHT TRANSMISSION BREAKDOWN Lens Shade number  
2



Manufacturer's Trademark  
JSP Dagger / Logo aziendale Oberon



Optical Class (1 – Class 1 – High quality for regular use. 2 –  
Class 2 – Medium quality for occasional use. 3 – Class 3 –  
Low quality for exceptional use)  
1



Medium Energy Impact resists a 6 mm, 0.86g ball @ 120  
m/s Maximum protection for goggles.  
B



Protection Against Short Circuit Electric Arc  
8



Resistance to Surface Damage by Fine Particles (optional)  
K



Resistance to fogging (optional)  
Sì, ma non "N"



Visor Length  
340mm



Material  
Visiera in policarbonato



Recyclable  
Sì

Product Weight  
465G

## CARATTERISTICHE



**Compatibile con la gamma di caschi  
EVO®, escluso l'EVO® 6100 full brim**

## DOWNLOAD

[Immagini Scaricabili \(ZIP\)](#)

[doc-afp-25-arc-faceshield.pdf \(PDF\)](#)



JSP Limited, Worsham Mill, Minster Lovell, Oxford OX29 0TA, England.

Tel: +44 (0)1993 826050 / Fax: +44 (0)1993 824411 / Email: [sales@jspsafety.com](mailto:sales@jspsafety.com) / Web: [www.jspsafety.com](http://www.jspsafety.com)

Do Not Publish without written permission from JSP Limited. Contact [copyright@jspsafety.com](mailto:copyright@jspsafety.com). Information correct in the United Kingdom at date of issue and may be subject to change. Any third-party machine and automated translations processed by users may have inaccuracies and should not be relied upon.

Page 2 of 2 / Issued 7 Feb 2025 / Copyright 2018 - 2025. JSP Limited. All Rights Reserved.

